

DATA SHEET

CAMBRIDGE Qt X 300/300D SOUND MASKING CONTROL MODULE



The Cambridge Qt™ X 300/300D control module is a sound masking generator, controller, third octave band equalizer and amplifier, with two auxiliary audio inputs to allow for distribution of audio from paging controllers and/or (background) music players. The Qt X 300/300D controls up to 3 zones of Qt Standard or Active emitters. The Qt X 300/300D control module is a compact three-zone networkable controller suitable for installations of up to 36,000 square feet (3,345 m²). Each zone can be independently adjusted for masking and aux audio levels and spectra. Both models feature full compatibility with Biamp's SageVue™ system management software.* When multiple controllers are included in a single system audio inputs can be shared across all controllers via AVB or Dante (300/D).

FEATURES

- Compatible with Qt Standard emitters and Qt Active emitters.
- Supports up to 3 zones
- AVB or Dante (300/D) media network
- 2 audio inputs for paging and music
- Contact closure integrates with fire alarm systems
- Front panel with LCD
- Front Panel Lock (via software control)
- Auto ramping
- Event scheduling
- Adjustable equalizer for masking and audio inputs
- 4 non-correlated sound masking audio sources per zone
- Built-in clock with system NTP support
- Wall mount bracket included, optional rack mount bracket also available
- Dual network ports (media / control)
- Web interface control by any web-enabled device
- Third party control API/Ethernet
- CE marked, UL listed, and RoHS compliant
- Covered by Biamp Systems' five-year warranty
- Manufactured in the U.S.A.
- TAA compliant
- GSA eligible

ARCHITECTS & ENGINEERS SPECIFICATION

The controller shall consist of all electronics required for operating a sound masking system from a single accessible location. Systems with distributed electronic packages above ceilings are not acceptable. The controller shall permit password protected access for control and monitoring via LAN/browser interface. The controller shall provide three zones and shall be sufficient to generate sound masking, audio control and audio power for up to 36,000 square feet (3,345 m²) of coverage. The unit shall be capable of time-of-day masking level control; per-zone settings shall be available for day/night levels and start times, ramping interval, and weekday/Sat/Sun behavior. Each audio output shall provide 4 non-correlated channels of masking noise to minimize comb filtering. The unit shall meet all requirements of Underwriters Laboratories, the US and Canadian National Electrical Codes, FCC Part 15, and all pertinent UK and EU codes. The controller shall be CE marked, UL listed, and shall be compliant with the RoHS directive. Warranty shall be 5 years. The controller shall be Qt X 300/300D.


*Feature available in future updates.

Qt X 300/300D SPECIFICATIONS

ACTIVE EMITTERS		Audio Inputs	
Max Emitter/Device Capacity:	50 Qt Active Emitters per cable run	Input Connector Type:	Captive Screw Terminal
Max Emitter Cabling Distance:	800 feet (243m) per cable run	Number of Inputs:	2 (Mono)
SPL¹		Input Level:	+24dBu (12.3VRMS max)
Minimum Masking SPL (@ 1m):	30dBA	Input Gain Range:	6dB steps
Maximum Masking SPL (@ 1m):	55dBA	Input Level Adjustment:	1dB steps
Maximum Music/Paging SPL (@ 1m):	74dBA	Input Impedance:	8kΩ
STANDARD EMITTERS		Phantom Power:	+48VDC (7mA/input)
Max Emitter/Device Capacity:	60 Qt Emitters per cable run	Remote Control	
Max Emitter Cabling Distance:	1000 feet (300m) per cable run	Connector Type:	Captive Screw Terminal
SPL¹		Input Type:	Contact Closure (Normally Open)
Minimum Masking SPL (@ 1m):	30dBA	Number of Inputs:	2
Maximum Masking SPL (@ 1m):	55dBA	Output Type:	Logic Status (5VDC)
Maximum Music/Paging SPL (@ 1m):	56dBA	Number of Outputs:	2
Output Equalization			2 Channels GPIO
Sound Masking (100Hz - 10kHz):	ISO 1/3 Octave Bands	Output Connections:	6 RJ-45
Music/Paging (125Hz - 8kHz):	ISO 1/1 Octave Bands	Minimum Output Impedance:	2Ω (per channel)
Masking		Power Supply	
Number of Masking Zones:	3 (2 cable runs per zone)	Operating Voltage:	100-240VAC 50/60Hz
Number of Non-Correlated Masking Sources:	4 per zone	Current Draw:	0.9A
Masking Level Adjustment:	0.5dB steps	Output:	24VDC @ 2.7A
		Max. Power Consumption (24VDC):	22W
		Included Accessories:	ACT Hole Saw Wall Bracket
		Overall Dimensions	
		Height:	3.5 inches (89mm)
		Width:	14 5/8 inches (371.5mm)
		Depth:	3.8 inches (97mm)
		Weight:	4.1 lbs (1.88 kg) (with surface mount bracket installed)
		Environmental:	
		Ambient Operating Temperature Range:	40 - 104° F (4 - 40° C)
		Humidity:	0-95% relative humidity (non-condensing)
		Altitude:	0-10,000 ft (0-3000m) MSL
		Compliance:	FCC Part 15B (USA) UL Listed (USA and Canada) CE Marked (Europe) RoHS Directive (Europe)

¹ Specifications based on use of Qt Emitters / Qt Active Emitter array and based on published layout practices

Qt X 300/300D BACK PANEL

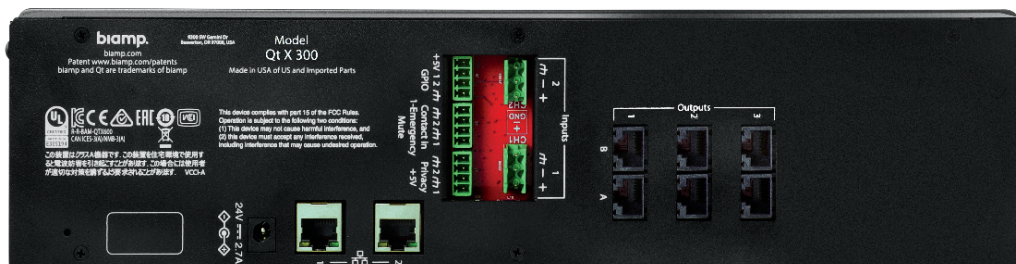

Biamp, Qt, and Qt X are either trademarks or registered trademarks of Biamp Systems, LLC in the United States and other countries. Other product names referenced may be trademarks or registered marks of their respective owners and Biamp Systems is not affiliated with or sponsored by these companies.

biamp.

✉ biampinfo@biamp.com

☎ +1 503 641 7287

🌐 www.biamp.com