

# DATA SHEET

## TESIRA® AMP-4300R CV

### 4-CHANNEL, 300W AMPLIFIER



Tesira® AMP-4300R CV is an AVB/TSN enabled, digital networked, four-channel amplifier capable of delivering 300 watts per channel at 70V/100V. The AMP-4300R CV functions as an integrated part of a Tesira audio system and is configured through Tesira software. The front panel OLED display allows for adjustments such as channel mute or all mute and provides feedback on overall status and channel performance. The digital amplifier features impedance monitoring, as well as dual AVB/TSN connections for network redundancy. An optional rear panel input slot can be used for analog failover or as an expander utilizing Tesira EX-MOD cards. The AMP-4300R CV is best suited for training rooms, lecture halls, performing arts, houses of worship or other applications where sound distribution or reinforcement is needed.

#### BENEFITS

- Designed for 70V/100V loudspeakers
- Receives an audio signal from anywhere on the Tesira system
- Optional expander slot can be used for analog failover or as an expander
- Optional analog failover allows signal flow even if the the digital audio stream is interrupted
- Dual ports for network redundancy

#### FEATURES

- Four channels; 300W per channel, constant voltage
- Impedance monitoring
- Dual AVB ports
- Optional I/O expander card slot
- Optional analog failover
- Front panel OLED display with capacitive touch navigation
- Supports port authentication via IEEE 802.1X
- Configurable via Tesira software
- Front panel control of individual and chassis-wide mutes/levels
- Rack mountable (2RU)
- CE marked, UL listed, and RoHS compliant
- Covered by Biamp Systems' five-year warranty


## ARCHITECTS & ENGINEERS SPECIFICATION

The digital amplifier shall be designed exclusively for use with Tesira® systems. The digital amplifier shall support AVB digital audio with redundant network connection on RJ-45 connectors. The digital amplifier shall provide 4 output channels rated for 300W each of maximum power on a 70V/100V constant voltage speaker line. The digital amplifier shall include a slot for installation of 4-channel analog audio card for use as analog failover or as analog inputs and outputs to the Tesira network. The digital amplifier shall be equipped with an RJ-45 Ethernet port for control connection to third party control systems and configuration. The digital amplifier shall support port authentication via IEEE 802.1X. The digital amplifier shall provide front panel LED identification of device power, status, alarm, activity, and system-wide alarms. The digital amplifier shall provide front panel OLED display for device information. The digital amplifier shall provide capacitive touch buttons for the navigation of menus in the OLED display and control of mute states and individual channel levels. The digital amplifier shall provide multicolor LED identification of signal, faults, analog failover, and mute. The digital amplifier shall be rack mountable and provide monitoring information to the DSP system including warnings and faults. The digital amplifier shall be CE marked, UL listed and shall be compliant with the RoHS directive. Warranty shall be 5 years. The digital amplifier shall be Tesira AMP-4300R CV.

## TESIRA AMP-4300R CV SPECIFICATIONS

<b>Number of Channels:</b>	4	<b>Dual AVB/TSN Input:</b>	RJ-45 (CAT-5 or higher) inputs; primary and secondary
<b>Maximum Rated Output: Single Channel, 70V/100V:</b>	300W	<b>Optional Analog Cards:</b>	Tesira EX-MOD cards: EIC-4, EIOC-4, EOC-4
<b>Frequency Response (20Hz-20kHz):</b>	± 1dB	<b>Environmental:</b>	
<b>THD+N (20Hz-20kHz, @ rated power):</b>	< 0.3%	<b>Ambient Operating Temperature Range:</b>	32 - 104° F (0 - 40° C)
<b>Dynamic Range (20Hz-20kHz):</b>	> 100dB	<b>Humidity:</b>	0-95% relative humidity (non-condensing)
<b>Balanced Input Impedance (Analog Failover Inputs):</b>	8 kΩ	<b>Altitude:</b>	0-10,000 ft (0-3000m) MSL
<b>Current Draw (100-240VAC 50/60Hz):</b>	5.5-2.3A	<b>Compliance:</b>	FCC Part 15B (USA) CE Marked (Europe) UL and C-UL listed (USA and Canada) RCM (Australia) EAC (Eurasian Customs Union) CCC (China) KCC (Korea) RoHS Directive (Europe)
<b>Cooling:</b>	Variable speed fan		
<b>Overall Dimensions:</b>			
<b>Height:</b>	3.5 inches (89mm)		
<b>Width:</b>	19 inches (483mm)		
<b>Depth:</b>	17.4 inches (441mm)		
<b>Weight:</b>	20.6 lbs (9.3 kg)		

## TESIRA AMP-4300R CV BACK PANEL

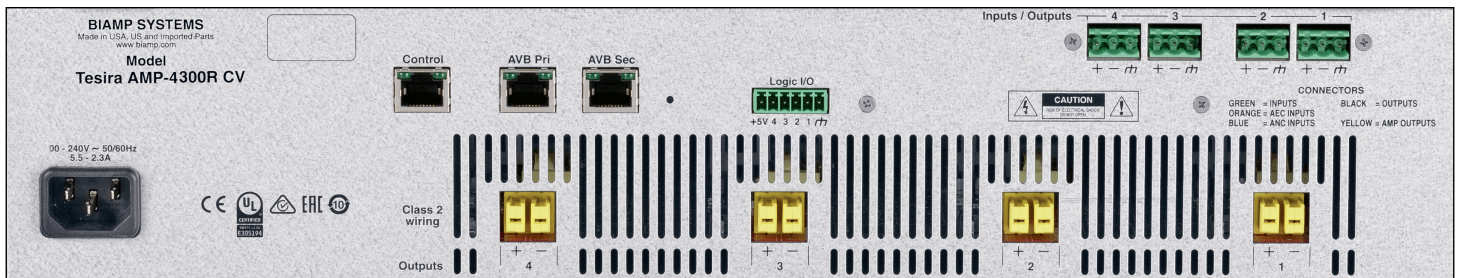

Biamp and Tesira are either trademarks or registered trademarks of Biamp Systems, LLC in the United States and other countries. Other product names referenced may be trademarks or registered marks of their respective owners and Biamp Systems is not affiliated with or sponsored by these companies.